



FOR USE ONLY WITH LOW VOLTAGE LANDSCAPE POWER UNITS THAT DO NOT EXCEED 25 AMPS, 15 VOLT MAXIMUM.

WARNING: Luminaires must be installed in accordance with the National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and may result in serious injury and/or damage to the luminaire.

SAFETY WARNING: Luminaire can become very hot depending on lamp wattage used. Lens and metal around lamp can become hot enough to blister hands. Particular care should be taken not to locate luminaires where small children can reach them if high wattage lamps are used.

LUMINAIRES ARE NOT TO BE INSTALLED WITHIN 10 FT. (3.05M) OF A POOL OR SPA. SECONDARY CABLE IS NOT TO BE BURIED MORE THAN 6". WHEN USING MULTIPLE LUMINAIRES, LOAD IS NOT TO EXCEED THE TOTAL WATTS OF TRANSFORMER RATING. DO NOT USE EXTENSION CORDS ON POWER UNITS.

NOTE: Always use UL recognized wire connectors for connections.

NOTE: Save these instructions for future reference.

LUMINAIRE MOUNTING


1. To prevent electrical shock, disconnect transformer from electrical supply before installation or service.

NOTE: If luminaire cannot be flush mounted, a J-box type mount (by others) may be used.

2. Strip the two (2) leads from the luminaire pigtail.

3. Using a safety connectors (provided), connect leads from the luminaire to the main supply cable leads.

4. Provide power to the luminaire and check for proper operation.

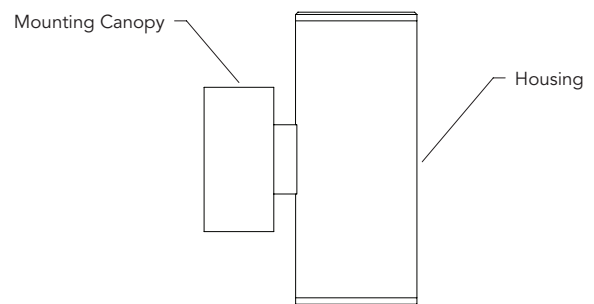

LUMINAIRE MOUNTING WITH ADJUSTABLE MOUNTING BRACKET

1. To prevent electrical shock, disconnect transformer from electrical supply before installation or service.

2. Strip the two (2) leads from the luminaire pigtail.

3. Using a safety connectors (provided), connect leads from the luminaire to the main supply cable leads.

4. Unscrew the connecting screws to separate outer plate.

5. Install outer plate on electrical box using appropriate flat head mounting screws (provided) (as shown in Fig. 1). This plate has been designed for 4-0 box as well as 1-gang box.

6. Reattach Inner plate using connecting screws making sure stand-offs are horizontal (as shown in Fig. 2).

7. Install the luminaire to adjustable mounting bracket assembly using brass ball screws (provided) (as shown in Fig. 3).

8. Provide power to the luminaire and check for proper operation.

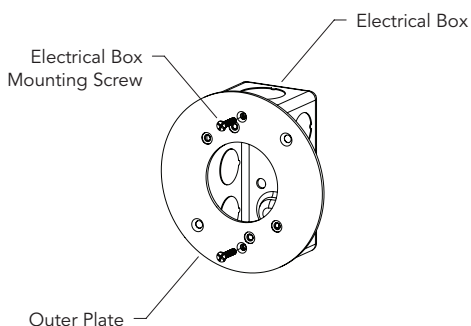


fig. 1





fig. 2



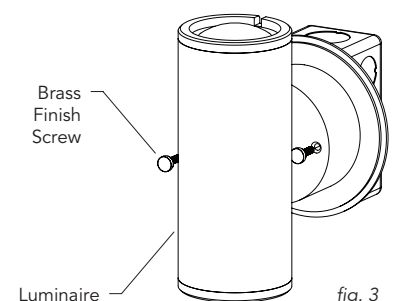

WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

1. Turn off/unplug and allow to cool before replacing lamp.
 2. Lamps get hot quickly! Contact only switch/plug when turning on.
 3. Do not touch hot lens, guard or enclosure.
 4. Keep lamp away from material that may burn.
 5. Do not operate luminaire fitting with a missing or damaged cover.
-

LED LAMP INSTALLATION/REPLACEMENT

CAUTION: Do not exceed maximum wattage marked on luminaire label.

1. To prevent electrical shock, disconnect transformer from electrical supply before service.
2. Remove lens and bezel to expose lamp.
3. Replace lamp with correct wattage and type marked on fixture label.
4. Re-install lens and bezel.

