



MODEL 2161 | Specification Sheet


Residential Series • Brass & Copper • Path & Area

TYPE: MODEL:

PROJECT:

PRODUCT FEATURES

Wattage	1 – 5 W
Voltage	9 – 15 VAC
Housing	Brass and Stainless Steel
Dimensions	4 ½" DIA x 16 ½" H

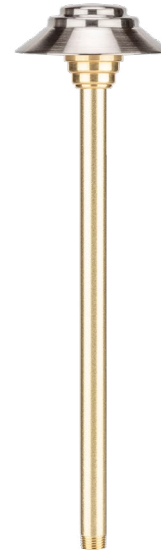

ORDERING INFORMATION

EXAMPLE: **PR-2161-BSN-W-LB5ND**

MOUNTING	MODEL	FINISH	LED
PR	2161		

MOUNTING	MODEL	FINISH	LED
PR ABS Ground Stake	2161	BSN Natural Brass and Stainless Steel	W-LB2ND 2.5 Watts Warm Integrated LED
			N-LB2ND 2.5 Watts Neutral Integrated LED
			C-LB2ND 2.5 Watts Cool Integrated LED
			W-LB5ND 5 Watts Warm Integrated LED
			N-LB5ND 5 Watts Neutral Integrated LED
			C-LB5ND 5 Watts Cool Integrated LED
		Also available in 18 standard powder coat finishes. See specifications on pg. 2 for description and order codes.	150-W-G4 1.5 Watts Warm G4 LED Lamp
			NL No Lamp



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)
Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING CONSTRUCTION:

Stainless Steel shade.
Twist-To-Lock Solid Brass lamp base.

STEM CONSTRUCTION:

½" Brass pipe.

FINISH:

Natural Brass and Stainless Steel.

Also available in powder coat finish with the following standard colors:
Black (B), Architectural Bronze (Z), Dark Bronze (DZ), Granite (GT), White (W),
Architectural Brick (BR), Light Bronze (LZ), Special Bronze (SB), Glossy Gray (GG),
Rust (R), Hunter Green (HG), Weathered Bronze (WB), Weathered Iron (WI),
Graphite Metallic (GM), Verde (G), Pewter (P), Mocha (M) and Olde Finish (OF).

LENS:

Textured, high-impact polycarbonate lens.

MOUNTING:

Bottom of stem threaded with ½" NPT.

FASTENERS:

All fasteners are stainless steel.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

LED:

- Integrated LED Module. 2.5 – 5 Watts.
- G4 LED Lamp. 1.5 Watts.

ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

DIMENSIONS

