



MODEL 2516 | Specification Sheet

Residential Series • Up / Accent / Downlight


TYPE: MODEL:

PROJECT:

PRODUCT FEATURES



Wattage	4.5 W or 5.5 W
Voltage	9 – 15 VAC
Lumens	295 or 389 Lumens
Lamp Type	MR-16 LED
Housing	Copper
Dimensions	2 1/2" DIA x 9 1/4" D

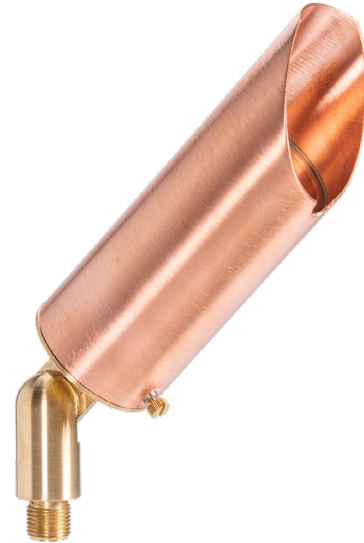

ORDERING INFORMATION

EXAMPLE: GR-2516-CSN-4.5-W-36-FR

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
	2516			
MOUNTING	MODEL	FINISH	LED	ACCESSORIES
GR ABS Ground Stake WB Brass Wall-Mount Canopy	2516	CSN Natural Copper Also available in 18 standard powder coat finishes. See specifications on pg. 2 for description and order codes.	4.5-W-15 4.5 Watts Warm 15° Narrow Spot 4.5-W-25 4.5 Watts Warm 25° Spot 4.5-W-36 4.5 Watts Warm 36° Flood 4.5-W-60 4.5 Watts Warm 60° Wide Flood 5.5-W-15 5.5 Watts Warm 15° Narrow Spot 5.5-W-25 5.5 Watts Warm 25° Spot 5.5-W-36 5.5 Watts Warm 36° Flood 5.5-W-60 5.5 Watts Warm 60° Wide Flood NL No Lamp	FR Frosted Lens BL Flat Cool Blue Lens SL Flat Spread Lens DBL Flat Dark Blue Lens GL Flat Dark Green Lens RL Flat Red Lens YL Flat Amber Lens HL Honeycomb louver 5 5' Wire Lead ORDERING NOTES Fixtures shipped with specified mounting hardware. If fixture is to be used in conjunction with Extended Arm Mount (EAM): Must specify with extended wire length



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)
Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING CONSTRUCTION:

Heavy-gauge, extruded copper with machined brass base.

FINISH:

Brushed Natural Copper.
(Brushed copper will rapidly age to an elegant rich bronze-like color and may develop areas of patina over time.)

Also available in powder coat finish with the following standard colors:

Black (**B**), Architectural Bronze (**Z**), Dark Bronze (**DZ**), Granite (**GT**), White (**W**), Architectural Brick (**BR**), Light Bronze (**LZ**), Special Bronze (**SB**), Glossy Gray (**GG**), Rust (**R**), Hunter Green (**HG**), Weathered Bronze (**WB**), Weathered Iron (**WI**), Graphite Metallic (**GM**), Verde (**G**), Pewter (**P**), Mocha (**M**) and Olde Finish (**OF**).

LENS:

Clear, tempered glass lens.
Optical effect lenses are available.

LED:

MR-11 LED Lamp.
200 Lumens.
4.5 Watts.

ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

MOUNTING:

Solid Brass knuckle with 1/2" NPS thread.

FASTENERS/INSERTS:

Fasteners are stainless steel and brass.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

LIGHT DISTRIBUTION:

Very Narrow Spot **15** (15°)
Narrow Spot **25** (25°)
Medium Flood **36** (36°)
Wide Flood **60** (60°)

DIMENSIONS

