




**MODEL 6502** | Specification Sheet  
Residential Series • Path & Area

TYPE:  MODEL:

PROJECT:

**PRODUCT FEATURES**

Wattage	1 – 5 W
Voltage	9 – 15 VAC
Housing	Aluminum
Dimensions	8 1/8" W x 25" H

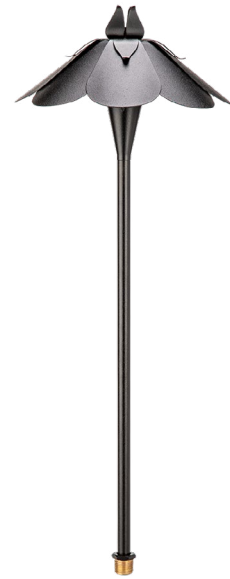

**ORDERING INFORMATION**

EXAMPLE: PR-6502-B-W-LB5ND

MOUNTING	MODEL	FINISH	LED
PR	6502		

MOUNTING	MODEL	FINISH	LED	ORDERING NOTES
PR ABS Ground Stake	6502	<b>B</b> Black	<b>W-LB2ND</b> 2.5 Watts   Warm   Integrated LED	Fixtures shipped with specified mounting hardware.  Custom length stems available - Consult local distributor.
		<b>Z</b> Architectural Bronze	<b>N-LB2ND</b> 2.5 Watts   Neutral   Integrated LED	
		<b>DZ</b> Dark Bronze	<b>C-LB2ND</b> 2.5 Watts   Cool   Integrated LED	
		<b>GT</b> Granite	<b>W-LB5ND</b> 5 Watts   Warm   Integrated LED	
		<b>W</b> White	<b>N-LB5ND</b> 5 Watts   Neutral   Integrated LED	
		<b>BR</b> Architectural Brick	<b>C-LB5ND</b> 5 Watts   Cool   Integrated LED	
		<b>LZ</b> Light Bronze	<b>150-W-G4</b> 1.5 Watts   Warm   G4 LED Lamp	
		<b>SB</b> Special Bronze	<b>NL</b> No Lamp	
		<b>GG</b> Glossy Gray		
		<b>R</b> Rust		
		<b>HG</b> Hunter Green		
		<b>WB</b> Weathered Bronze		
		<b>WI</b> Weathered Iron		
		<b>GM</b> Graphite Metallic		
		<b>G</b> Verde		
<b>P</b> Pewter				
<b>M</b> Mocha				
<b>OF</b> Olde Finish				



**PROFESSIONAL OUTDOOR LIGHTING**

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)  
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



**SPECIFICATIONS**

**HOUSING CONSTRUCTION:**

Die-cast A360 aluminum with stamped aluminum petals..

**STEM CONSTRUCTION:**

¼" schedule-40 aluminum pipe.

**FINISH:**

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

**LENS:**

Clear, high-impact polycarbonate lens.

**MOUNTING:**

Bottom of stem fitted with ½" NPT Bushing.

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

**LED:**

- Integrated LED Module. 2.5 – 5 Watts.
- G4 LED Lamp. 1.5 Watts.

**ELECTRICAL:**

Input voltage range 9 - 15 VAC.  
Low voltage transformer required to operate (sold separately).

**DIMENSIONS**

