MODEL **5217** | Specification Sheet

Residential Series • Specialty / Underwater

TYPE: MODEL:

PROJECT:

PRODUCT FEATURES

Wattage	4.5 W or 5.5 W
Voltage	9 – 15 VAC
Lumens	295 or 389 Lumens
Lamp Type	MR-16 LED
Housing	Injection-Molded Polymer
Dimensions	5" DIA x 5" D

ORDERING INFORMATION

EXAMPLE: ***UW-5217-B-4.5-W-36-CFR***

CATEGORY	MODEL	FINISH	LED	ACCESSORIES
UW	5217	B		

CATEGORY	MODEL	FINISH	LED	ACCESSORIES
UW Underwater	**5217**	**B** Black	**4.5-W-15** 4.5 Watts | Warm | 15° Narrow Spot **4.5-W-25** 4.5 Watts | Warm | 25° Spot **4.5-W-36** 4.5 Watts | Warm | 36° Flood **4.5-W-60** 4.5 Watts | Warm | 60° Wide Flood **5.5-W-15** 5.5 Watts | Warm | 15° Narrow Spot **5.5-W-25** 5.5 Watts | Warm | 25° Spot **5.5-W-36** 5.5 Watts | Warm | 36° Flood **5.5-W-60** 5.5 Watts | Warm | 60° Wide Flood **NL** No Lamp	**CFR** Crowned Frosted Lens **CBL** Crowned Cool Blue Lens **SL** Flat Spread Lens **DBL** Flat Dark Blue Lens **GL** Flat Dark Green Lens **RL** Flat Red Lens **YL** Flat Amber Lens **HL** Honeycomb louver

ORDERING NOTES

5217 **NOT** for use in swimming pools or spas.

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.

SPECIFICATIONS

HOUSING CONSTRUCTION:
Injection-molded glass-reinforced polymer.

LENS COVER CONSTRUCTION:
Injection-molded glass-reinforced polymer.

FINISH APPEARANCE:
Water chemistry (including dissolved chemicals, soluble salts, or tannins) may cause cosmetic changes to the fixture over time. These changes do not affect light output or performance. This fixture is not intended for use in swimming pools or spas.

LENS:
Clear, tempered glass lens.
Optical effect lenses are available.

OPTICS/AIMING:
Adjustable mounting bracket provides precise light aiming.
Adjustable lamp bracket provides up to ±25° of tilt. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping.

LENS:
Clear, tempered glass lens.
Optical effect lenses are available.

OPTICS/AIMING:
Adjustable mounting bracket provides precise light aiming.
Adjustable lamp bracket provides up to ±25° of tilt. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping.

MOUNTING:
Adjustable mounting bracket mounted on a cement counter weight base for stable placement underwater.

FASTENERS/INSERTS:
All fasteners are stainless steel with brass inserts.

WIRING:
Pre-wired with a fifteen-foot pigtail of 18-3 submersible cable.
Connectors for a required above-water connection are also included.

CERTIFICATIONS | STANDARDS | COMPLIANCE:
- Buy American Act (**BAA**)
- Build America, Buy America Act (**BABA**)

LED:
MR-16 LED Lamp.
295 or 389 Lumens.
4.5 or 5.5 Watts.

LIGHT DISTRIBUTION:
Very Narrow Spot **15** (15°)
Narrow Spot **25** (25°)
Medium Flood **36** (36°)
Wide Flood **60** (60°)

ELECTRICAL:
Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

CAUTION:
Follow installation instructions as well as local electrical codes when installing.
NOT for use in swimming pools or spas.

DIMENSIONS

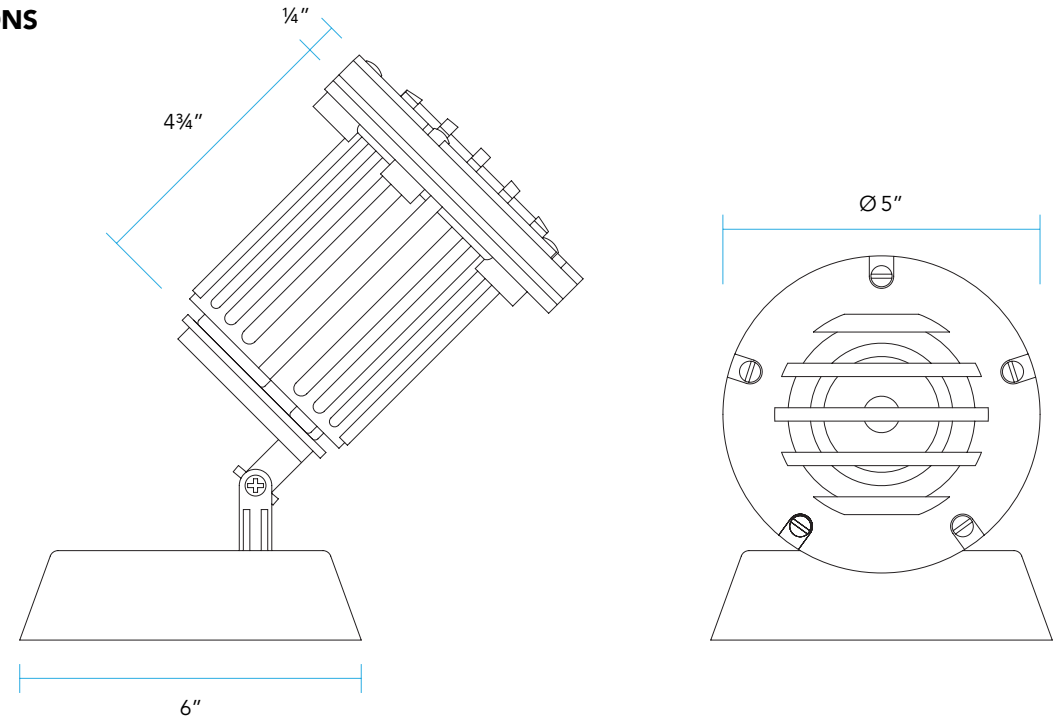

www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.