



**MODEL 2219-LS** | Specification Sheet  
Residential Series • Up / Accent / Downlight

TYPE:  MODEL:

PROJECT:

**PRODUCT FEATURES**




Wattage	4.5 W or 5.5 W
Voltage	9 – 15 VAC
Lumens	295 or 389 Lumens
Lamp Type	MR-16 LED
Housing	Die-cast Aluminum
Dimensions	2 1/4" DIA x 10 1/4" D

**ORDERING INFORMATION**

EXAMPLE: GR-2219-LS-B-4.5-W-36-FR

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
	2219-LS			

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
<b>GR</b> ABS ground stake <b>WR</b> Wall-mount canopy <b>TR</b> Tree-mount junction box	<b>2219-LS</b>	<b>B</b> Black <b>Z</b> Architectural Bronze <b>DZ</b> Dark Bronze <b>GT</b> Granite <b>W</b> White	<b>BR</b> Architectural Brick <b>LZ</b> Light Bronze <b>SB</b> Special Bronze <b>GG</b> Glossy Gray <b>R</b> Rust <b>HG</b> Hunter Green <b>WB</b> Weathered Bronze <b>WI</b> Weathered Iron <b>GM</b> Graphite Metallic	<b>G</b> Verde <b>P</b> Pewter <b>M</b> Mocha <b>OF</b> Olde Finish

LED	ACCESSORIES	ORDERING NOTES
<b>4.5-W-15</b> 4.5 Watts   Warm   15° Narrow Spot <b>4.5-W-25</b> 4.5 Watts   Warm   25° Spot <b>4.5-W-36</b> 4.5 Watts   Warm   36° Flood <b>4.5-W-60</b> 4.5 Watts   Warm   60° Wide Flood <b>5.5-W-15</b> 5.5 Watts   Warm   15° Narrow Spot <b>5.5-W-25</b> 5.5 Watts   Warm   25° Spot <b>5.5-W-36</b> 5.5 Watts   Warm   36° Flood <b>5.5-W-60</b> 5.5 Watts   Warm   60° Wide Flood <b>NL</b> No Lamp	<b>FR</b> Frosted Lens <b>BL</b> Flat Cool Blue Lens <b>SL</b> Flat Spread Lens <b>DBL</b> Flat Dark Blue Lens <b>GL</b> Flat Dark Green Lens <b>RL</b> Flat Red Lens <b>YL</b> Flat Amber Lens <b>HL</b> Honeycomb louver <b>5</b> 5' Wire Lead	Fixtures shipped with specified mounting hardware.  If fixture is to be used in conjunction with Extended Arm Mount ( <b>EAM</b> ): Must specify with extended wire length  Wireless Control <b>RGBW</b> Smart LED available. Consult Vista Customer Service for details. 



**PROFESSIONAL  
OUTDOOR LIGHTING**

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)  
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



## SPECIFICATIONS

**HOUSING CONSTRUCTION:**

Die-cast A360 aluminum.

**FINISH:**

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

**LENS:**

Clear, tempered glass lens.  
Optical effect lenses are available.

**MOUNTING:**

Injection-molded composite knuckle with 1/2" NPS thread.

**FASTENERS/INSERTS:**

All fasteners are stainless steel.

**WIRING:**

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

**LED:**

MR-16 LED Lamp.  
295 or 389 Lumens.  
4.5 or 5.5 Watts.


**ELECTRICAL:**

Input voltage range 9 - 15 VAC.  
Low voltage transformer required to operate (sold separately).

**LIGHT DISTRIBUTION:**

Very Narrow Spot **15** (15°)  
Narrow Spot **25** (25°)  
Medium Flood **36** (36°)  
Wide Flood **60** (60°)

## DIMENSIONS

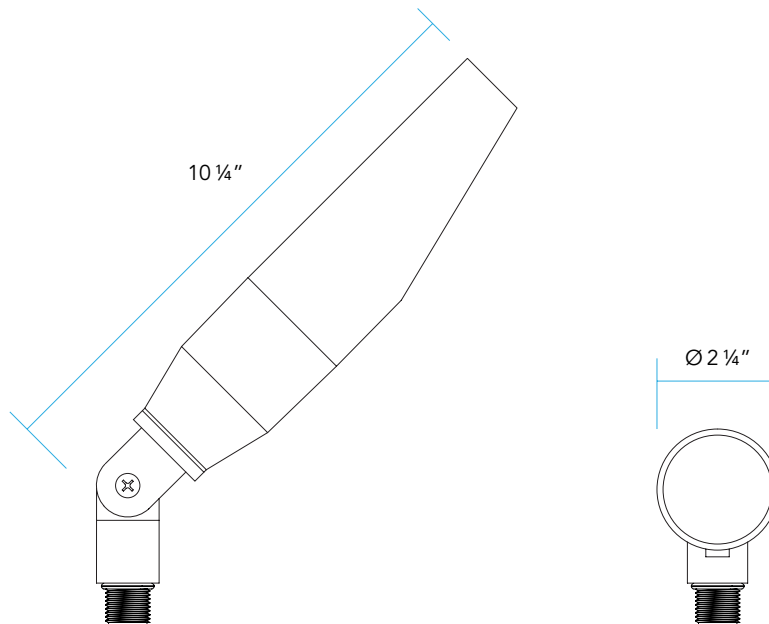



**STANDARD MOUNTING ACCESSORIES**

**GR**



**WR**



**TR**



Type	Ground Stake
Material	ABS
Dimensions	9" H x 2 3/8" DIA

Type	Mounting Canopy
Material	Aluminum
Finish	Powder Coat
Dimensions	2 3/4" DIA x 3/4" D

Type	Tree Mount Junction Box
Material	Aluminum
Finish	Powder Coat
Dimensions	5 5/8" L x 1 5/8" W x 1 7/8" D

