




MODEL 9240 | Specification Sheet
Residential Series • Specialty / Downlight

TYPE: MODEL:

PROJECT:

PRODUCT FEATURES

Wattage	1 – 5 W
Voltage	9 – 15 VAC
Housing	Aluminum
Dimensions	8 1/8" DIA x 7" H

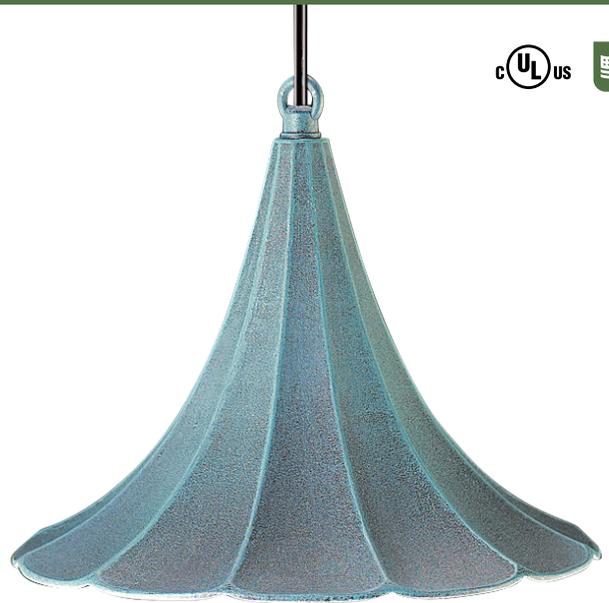

ORDERING INFORMATION

EXAMPLE: *HT-9240-B-W-LB5ND*

CATEGORY	MODEL	FINISH	LED
HT	9240		

CATEGORY	MODEL	FINISH	LED
HT Hanging Downlight	9240	B Black	W-LB2ND 2.5 Watts Warm Integrated LED
		Z Architectural Bronze	N-LB2ND 2.5 Watts Neutral Integrated LED
		DZ Dark Bronze	C-LB2ND 2.5 Watts Cool Integrated LED
		GT Granite	W-LB5ND 5 Watts Warm Integrated LED
		W White	N-LB5ND 5 Watts Neutral Integrated LED
		BR Architectural Brick	C-LB5ND 5 Watts Cool Integrated LED
		LZ Light Bronze	150-W-G4 1.5 Watts Warm G4 LED Lamp
		SB Special Bronze	NL No Lamp
		GG Glossy Gray	
		R Rust	
		HG Hunter Green	
		WB Weathered Bronze	
		WI Weathered Iron	
		GM Graphite Metallic	
		G Verde	
P Pewter			
M Mocha			
OF Olde Finish			



**PROFESSIONAL
OUTDOOR LIGHTING**

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING CONSTRUCTION:
Die-cast A360 aluminum.

FINISH:
Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

LENS:
Clear, high-impact polycarbonate lens.

MOUNTING:
Solid brass loop with a six-foot stainless steel cable-hanger included.

FASTENERS:
All fasteners are stainless steel.

WIRING:
Prewired with a 36" pigtail of 18-2 SPT1 UV resistant cable and watertight connectors.

CERTIFICATION:
UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

LED:

- Integrated LED Module. 2.5 – 5 Watts.
- G4 LED Lamp. 1.5 Watts.

ELECTRICAL:
Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

DIMENSIONS

