



MODEL 2220-LS | Specification Sheet

Residential Series • Up / Accent / Downlight

TYPE:

MODEL:

PROJECT:

PRODUCT FEATURES



Wattage	4.5 W or 5.5 W
Voltage	9 – 15 VAC
Lumens	295 or 389 Lumens
Lamp Type	MR-16 LED
Housing	Die-cast Aluminum
Dimensions	2 1/4" DIA x 6 7/8" D



ORDERING INFORMATION

EXAMPLE: GR-2220-B-4.5-W-36-LS-FR

MOUNTING	MODEL	FINISH	LED	SHROUD	ACCESSORIES
	2220			LS	

MOUNTING	MODEL	FINISH	SHROUD	ACCESSORIES	ORDERING NOTES
GR ABS ground stake	2220	B Black	LS Long Shroud	BR Architectural Brick	G Verde
WR Wall-mount canopy		Z Architectural Bronze		LZ Light Bronze	P Pewter
TR Tree-mount junction box		DZ Dark Bronze		SB Special Bronze	M Mocha
		GT Granite		GG Glossy Gray	OF Olde Finish
		W White		R Rust	
				HG Hunter Green	
				WB Weathered Bronze	
				WI Weathered Iron	
				GM Graphite Metallic	
LED	SHROUD	ACCESSORIES			
4.5-W-15 4.5 Watts Warm 15° Narrow Spot	LS Long Shroud	FR Frosted Lens			Fixtures shipped with specified mounting hardware.
4.5-W-25 4.5 Watts Warm 25° Spot		BL Flat Cool Blue Lens			
4.5-W-36 4.5 Watts Warm 36° Flood		SL Flat Spread Lens			If fixture is to be used in conjunction with Extended Arm Mount (EAM):
4.5-W-60 4.5 Watts Warm 60° Wide Flood		DBL Flat Dark Blue Lens			Must specify with extended wire length
5.5-W-15 5.5 Watts Warm 15° Narrow Spot		GL Flat Dark Green Lens			
5.5-W-25 5.5 Watts Warm 25° Spot		RL Flat Red Lens			Wireless Control RGBW Smart LED available.
5.5-W-36 5.5 Watts Warm 36° Flood		YL Flat Amber Lens			Consult Vista Customer Service for details.
5.5-W-60 5.5 Watts Warm 60° Wide Flood		HL Honeycomb louver			
NL No Lamp		5 5' Wire Lead			



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)

1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



RESIDENTIAL
LANDSCAPE LIGHTING

MODEL 2220-LS | Specification Sheet

Residential Series • Up / Accent / Downlight

SPECIFICATIONS

HOUSING CONSTRUCTION:

Die-cast A360 aluminum.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

LENS:

Clear, tempered glass lens.

Optical effect lenses are available.

MOUNTING:

Injection-molded composite knuckle with 1/2" NPS thread.

FASTENERS/INSERTS:

All fasteners are stainless steel.

LED:

MR-16 LED Lamp.
295 or 389 Lumens.
4.5 or 5.5 Watts.

ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.


CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

LIGHT DISTRIBUTION:

Very Narrow Spot **15** (15°)
Narrow Spot **25** (25°)
Medium Flood **36** (36°)
Wide Flood **60** (60°)

DIMENSIONS

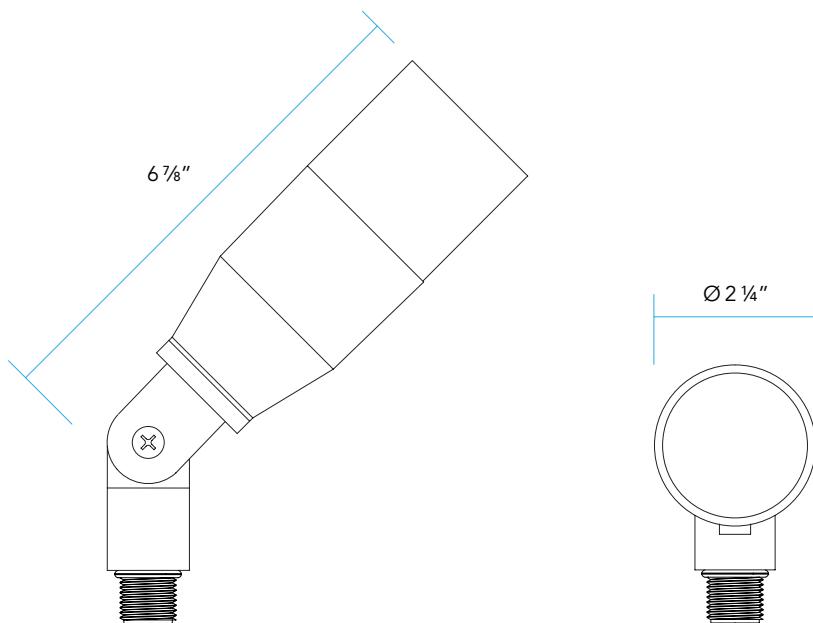

PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)

1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction
of the fixture shown without further notification.

Page 2 of 2
REV 01.27.26