





See ordering information
» Stainless steel springs» Teflon-jacketed wire leads
 » Soda-lime glass » For optical effect lenses, see ordering information.
ure. For other lamp and wattage 128-130.

PHOTOMETRICS

» For photometric data, see pages 131-149.





	MOUNTING
DL-2236	» Adjustable bracket
DS-2236	» Adjustable bracket
DL-2237	» Adjustable bracket » Junction Box
DS-2237	» Adjustable bracket » Junction Box
FASTENE	RS

» Stainless steel and brass fasteners

WIRING

» Prewired with a five-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to the supply cable.

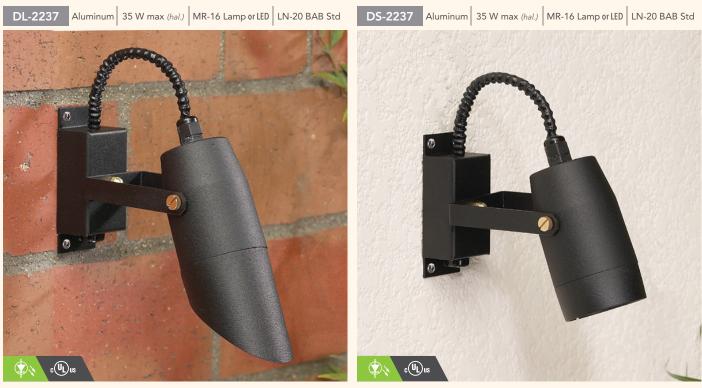



LED SPECIFICATIONS	LOOK IOI UIID II	nark on products where LE		
LED Lamp				
High Output Plug-in LED lamp with See page 128 for extended specific			e for 30,000 hours with an o	operating voltage of 9-15 VAC.
ORDERING INFORMATION	Select appropriate choice from each column			example: DS-2236-B-BAB-E
Mounting	No.	Finish	Lamp	Lenses/Accessories
DS Short Shroud DL Long Shroud	2236 2237	 B Black Z Architectural Bronze DZ Dark Bronze LZ Light Bronze SB Special Bronze G Verde P Pewter BR Architectural Brick GT Granite TC Terracotta R Rust HG Hunter Green M Mocha WB Weathered Bronze WI Weathered Iron W White 	See reference codes, pages 128-130	BLFlat Cool-Blue LensSLFlat Spread LensFRFlat Frosted LensDBLFlat Dark Blue LensGLFlat Dark Green LensRLFlat Red LensYLFlat Amber LensHLHoneycomb Louver

Fixtures shipped with standard lamp, unless otherwise specified, and with specified mounting hardware.

VISTA

