



MODEL 2219-LS-SP | Specification Sheet

Residential Series • Up / Accent / Downlight

TYPE:

MODEL:

PROJECT:

PRODUCT FEATURES



Wattage	4.5 W or 5.5 W
Voltage	9 – 15 VAC
Lumens	295 or 389 Lumens
Lamp Type	MR-16 LED
Housing	Die-cast Aluminum
Dimensions	2 ¼" DIA x 10 ¾" D

ORDERING INFORMATION

EXAMPLE: GR-2219-LS-SP-B-4.5-W-36-FR

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
	2219-LS-SP			

MOUNTING	MODEL	FINISH	LED	ACCESSORIES
GR ABS ground stake WR Wall-mount canopy TR Tree-mount junction box	2219-LS-SP	B Black Z Architectural Bronze DZ Dark Bronze GT Granite W White	BR Architectural Brick LZ Light Bronze SB Special Bronze GG Glossy Gray R Rust HG Hunter Green WB Weathered Bronze WI Weathered Iron GM Graphite Metallic	G Verde P Pewter M Mocha OF Olde Finish

LED	ACCESSORIES	ORDERING NOTES
4.5-W-15 4.5 Watts Warm 15° Narrow Spot 4.5-W-25 4.5 Watts Warm 25° Spot 4.5-W-36 4.5 Watts Warm 36° Flood 4.5-W-60 4.5 Watts Warm 60° Wide Flood 5.5-W-15 5.5 Watts Warm 15° Narrow Spot 5.5-W-25 5.5 Watts Warm 25° Spot 5.5-W-36 5.5 Watts Warm 36° Flood 5.5-W-60 5.5 Watts Warm 60° Wide Flood NL No Lamp	FR Frosted Lens BL Flat Cool Blue Lens SL Flat Spread Lens DBL Flat Dark Blue Lens GL Flat Dark Green Lens RL Flat Red Lens YL Flat Amber Lens HL Honeycomb louver 5 5' Wire Lead	Fixtures shipped with specified mounting hardware. If fixture is to be used in conjunction with Extended Arm Mount (EAM): Must specify with extended wire length Wireless Control RGBW Smart LED available. Consult Vista Customer Service for details.



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)
Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING CONSTRUCTION:

Die-cast A360 aluminum.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

LENS:

Clear, tempered glass lens.
Optical effect lenses are available.

MOUNTING:

Injection-molded composite knuckle with 1/2" NPS thread.

FASTENERS/INSERTS:

All fasteners are stainless steel.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

LED:

MR-16 LED Lamp.
295 or 389 Lumens.
4.5 or 5.5 Watts.


ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

LIGHT DISTRIBUTION:

Very Narrow Spot **15** (15°)
Narrow Spot **25** (25°)
Medium Flood **36** (36°)
Wide Flood **60** (60°)

DIMENSIONS

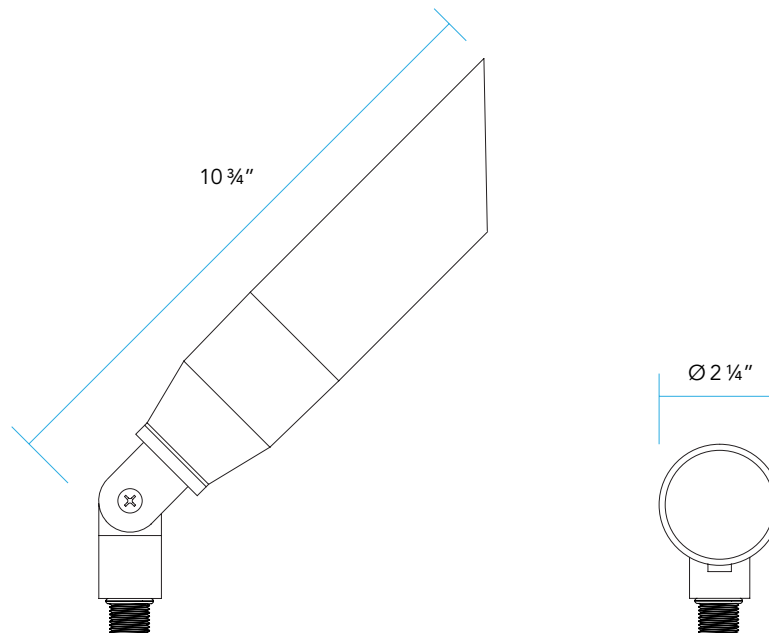



STANDARD MOUNTING ACCESSORIES

GR



Type	Ground Stake
Material	ABS
Dimensions	9" H x 2 3/8" DIA

WR



Type	Mounting Canopy
Material	Aluminum
Finish	Powder Coat
Dimensions	2 3/4" DIA x 3/4" D

TR



Type	Tree Mount Junction Box
Material	Aluminum
Finish	Powder Coat
Dimensions	5 5/8" L x 1 5/8" W x 1 7/8" D

