



6510 Aluminum | 20 W max (halogen) | T3 Lamp or LED | LN-10 T3 Std



6512 Aluminum | 20 W max (halogen) | T3 Lamp or LED | LN-10 T3 Std




	HOUSING
4216	<ul style="list-style-type: none"> » Die-cast » Copper-free aluminum
6510	<ul style="list-style-type: none"> » Die-cast » Copper-free aluminum » Stamped aluminum petals
6512	<ul style="list-style-type: none"> » Die-cast » Copper-free aluminum » Stamped aluminum petals
PHT-4216	<ul style="list-style-type: none"> » Die-cast » Copper-free aluminum » 12" Plant-hanging chains (max. load 7 lbs.)
PHT-6510	<ul style="list-style-type: none"> » Die-cast » Copper-free aluminum » Stamped aluminum petals » 12" Plant-hanging chains (max. load 7 lbs.)

FINISH
<ul style="list-style-type: none"> » Polyester powder-coated finish. See ordering information for available colors.
SOCKET/LAMP HOLDER
<ul style="list-style-type: none"> » Proprietary ceramic socket » Nickel contacts » Stainless steel springs » Teflon-jacketed wire leads
LENS
<ul style="list-style-type: none"> » Clear » High impact polycarbonate
LAMP TYPE
<ul style="list-style-type: none"> » Standard lamp included with fixture. For other lamp and wattage options see Lamp Guide, pages 128-130.
PHOTOMETRICS
<ul style="list-style-type: none"> » For photometric data, see pages 131-149.
MOUNTING
<ul style="list-style-type: none"> » Solid brass hanging loop » Six-foot stainless steel cable hanger with screw eye (max. load 7 lbs.)
FASTENERS
<ul style="list-style-type: none"> » Stainless steel fasteners
WIRING
<ul style="list-style-type: none"> » Prewired with a three-foot pigtail of 18-2 SPT1 UV-resistant cable and weather resistant connectors for a secure connection to the supply cable.

PHT-6510




Aluminum
20 W max (halogen)
T3 Lamp or LED
LN-10 T3 Std

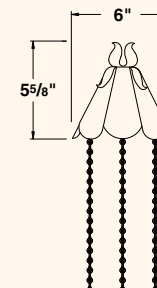


PHT-4216




Aluminum
20 W max (halogen)
T3 Lamp or LED
LN-10 T3 Std

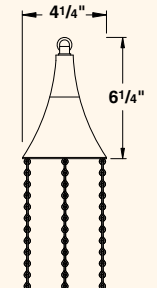

4216

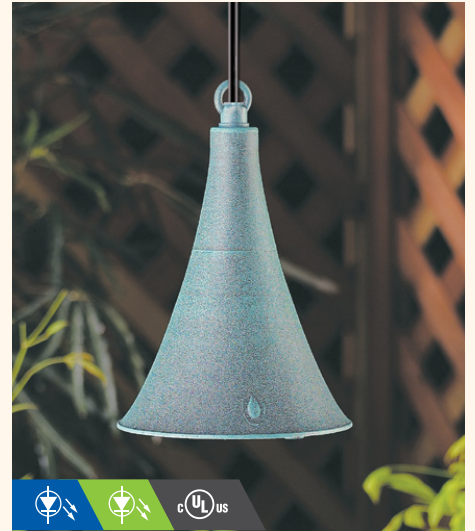

Aluminum
20 W max (halogen)
T3 Lamp or LED
LN-10 T3 Std



LED SPECIFICATIONS Look for this mark on products where LED options are available.

LED Lamp	Integrated LED
High Output Plug-in LED lamp with Vista exclusive smart-driver, powered to operate for 30,000 hours with an operating voltage of 9-15 VAC. See page 128 for extended specifications and options.	High Output LED lamp assembly with Vista exclusive smart-driver, powered to operate for 50,000 hours with an operating voltage of 9-15 VAC. See page 130 for extended specifications and options.

ORDERING INFORMATION Select appropriate choice from each column example: HT-6510-B-10 T3

Mounting	No.	Finish	Lamp	Lenses/Accessories	
HT Brass loop with stainless steel cable hanger	4216	B Black	LAMP See reference codes, pages 128-130	FR Flat Frosted Lens	
		Z Architectural Bronze			
	6510 6512	DZ Dark Bronze	INTEGRATED LED See reference codes, page 130, group B		
		LZ Light Bronze			
		SB Special Bronze			
		G Verde			
		P Pewter			
		BR Architectural Brick			
HT Brass loop with stainless steel cable hanger					GT Granite
PHT Brass loop with stainless steel cable hanger and 12" plant-hanging chains					TC Terracotta
					R Rust
					HG Hunter Green
					M Mocha
					WB Weathered Bronze
					WI Weathered Iron
		W White			

NOTE: not all accessories are available for all fixtures. See footnotes below before ordering. Fixtures shipped with standard lamp, unless otherwise specified, and with specified mounting hardware.