





6517
 Aluminum
 20 W max (halogen)
 T3 Lamp or LED
 LN-10 T3 Std

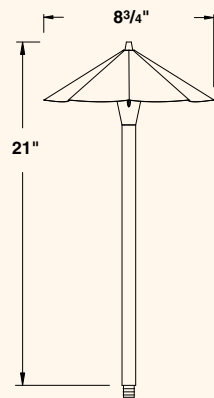

6515
 Aluminum
 20 W max (halogen)
 T3 Lamp or LED
 LN-10 T3 Std

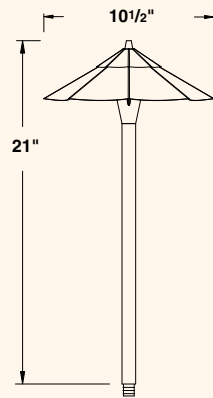

6515 Caribbean Sand



6515 Pacific Blue



6515 Wild Mustard



6515 Hunter Green



6515 Safari Brown



6515 Polynesian Beige



6515 Mediterranean White/Blue



SHADE	<ul style="list-style-type: none"> » 6515 only » Acrylic canvas » 100% solution dyed » UV resistant » Shade/Housing is interchangeable » Warrantied for 3 years
HOUSING	<ul style="list-style-type: none"> » Die-cast » Copper-free aluminum
STEM	<ul style="list-style-type: none"> » 1/2" Pipe » Schedule 40 aluminum
FINISH	<ul style="list-style-type: none"> » Polyester powder-coated finish » Cabana Brown
SOCKET/LAMP HOLDER	<ul style="list-style-type: none"> » Proprietary ceramic socket » Nickel contacts » Stainless steel springs » Teflon-jacketed wire leads

LENS	<ul style="list-style-type: none"> » Clear » High impact polycarbonate
LAMP TYPE	<ul style="list-style-type: none"> » Standard lamp included with fixture. For other lamp and wattage options see Lamp Guide, pages 128-130.
PHOTOMETRICS	<ul style="list-style-type: none"> » For photometric data, see pages 131-149.
MOUNTING	<ul style="list-style-type: none"> » Bottom of stem threaded with 1/2" NPT » Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or mounting canopies. » See ordering information for mounting options. For optional mounting accessories, see pages 126-127.
FASTENERS	<ul style="list-style-type: none"> » Stainless steel fasteners
WIRING	<ul style="list-style-type: none"> » Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to the supply cable.

LED SPECIFICATIONS Look for this mark on products where LED options are available.	
LED Lamp	Integrated LED
High Output Plug-in LED lamp with Vista exclusive smart-driver, powered to operate for 30,000 hours with an operating voltage of 9-15 VAC. See page 128 for extended specifications and options.	High Output LED lamp assembly with Vista exclusive smart-driver, powered to operate for 50,000 hours with an operating voltage of 9-15 VAC. See page 130 for extended specifications and options.

ORDERING INFORMATION <i>Select appropriate choice from each column</i>					<i>example: PR-6515-BG-10 T3</i>
Mounting	No.	Finish	Lamp	Lenses/Accessories	
PR Ground stake	6515	BG Polynesian Beige	GR Hunter Green	LAMP See reference codes, pages 128-130	FR Flat Frosted Lens
		BL Pacific Blue	MT Wild Mustard		
6517	6517	BN Safari Brown	S Caribbean Sand	INTEGRATED LED See reference codes, page 130, group B	
		BW Mediterranean White/Blue			
		B Black	GT Granite		
		Z Architectural Bronze	TC Terracotta		
		DZ Dark Bronze	R Rust		
		LZ Light Bronze	HG Hunter Green		
		SB Special Bronze	M Mocha		
		G Verde	WB Weathered Bronze		
		P Pewter	WI Weathered Iron		
		BR Architectural Brick	W White		

NOTE: not all accessories are available for all fixtures. See footnotes below before ordering. Fixtures shipped with standard lamp, unless otherwise specified, and with specified mounting hardware.