



# INSTALLATION INSTRUCTIONS

# TMS-120

## TREE MOUNT JUNCTION BOX

**WARNING:** Junction box must be installed and grounded in accordance with the National Electrical Code (NEC) and local codes. Failure to do so may result in serious injury and/or damage to the junction box or attached luminaire.

**SAFETY WARNING:** Luminaire can become hot depending on lamp wattage. Lens and housing around lamp can become hot enough to blister hands. Particular care should be taken not to locate luminaires where small children can reach them if high wattage lamps are used.

**NOTE:** Always use UL recognized wire connectors for connections.


**NOTE:** Save these instructions for future reference.

JUNCTION BOX IS UL LISTED FOR ABOVE GRADE INSTALLATION ONLY.



## TREE MOUNT INSTALLATION

1. Place Tree Mount Box at desired location on tree.
2. Snap in quick-locking fasteners to secure.
3. Adjust nylon straps to fit snugly around the tree trunk.
4. Secure conduit (by others) to bottom 1/2" NPT fitting and feed wires through.
5. Attach green ground wire to green ground screw terminal.
6. Thread luminaire into 1/2" NPT fitting and secure with allen screw (provided) at desired location.
7. Attach luminaire leads to circuit leads observing polarity, black to black, white to white and green to ground.
8. Insert all wires into box and secure front cover using gasket (provided) and two (2) phillips head screws (provided).
9. Supply power to the junction box and check for proper operation.

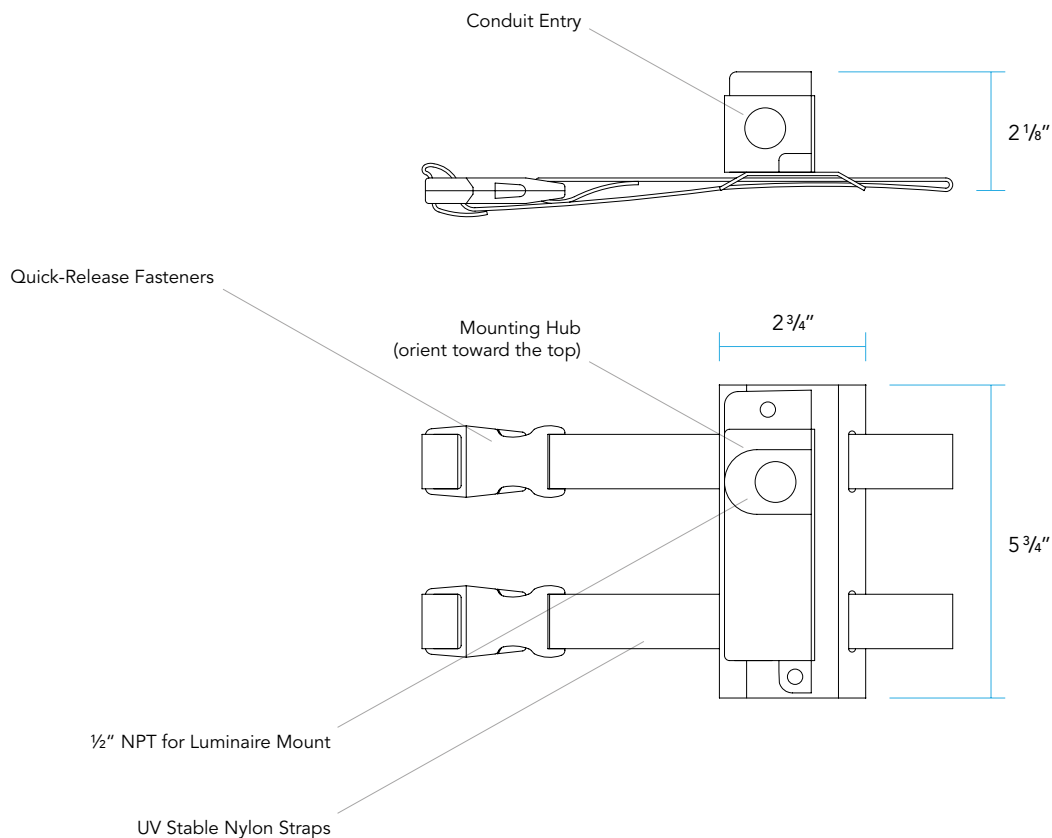

**PROFESSIONAL  
OUTDOOR LIGHTING**

**www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478)**

1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of fixtures shown in this document without further notification.

Page 1 of 1  
REV 09.09.25